



# Curtis RCD718 Teardown

Teardown of a Curtis RCD718 home stereo.

Written By: bthompsdavid



## INTRODUCTION


Teardown of a Curtis RCD718 home stereo.

## Step 1 — Curtis RCD718 Teardown



- First things first, you're gonna need to remove the outside screws that will be in your way later if you don't remove them.
- Start off on the back, there are a total of 6 screws on the back side of this stereo. You only need to remove 2, the 2 that are on the grey part, not the metal. More specifically, the screw that is under the speaker plug-ins, and the screw on the top middle of the back.
- Next you will need to remove the screws on the top. This is the only place in/on the entire stereo where the screws are NOT Phillips. For these screws, you will need a hex 2.5 screwdriver, this can be found in most IFIXIT kits. There are 4 of them on the top of the stereo.

## Step 2

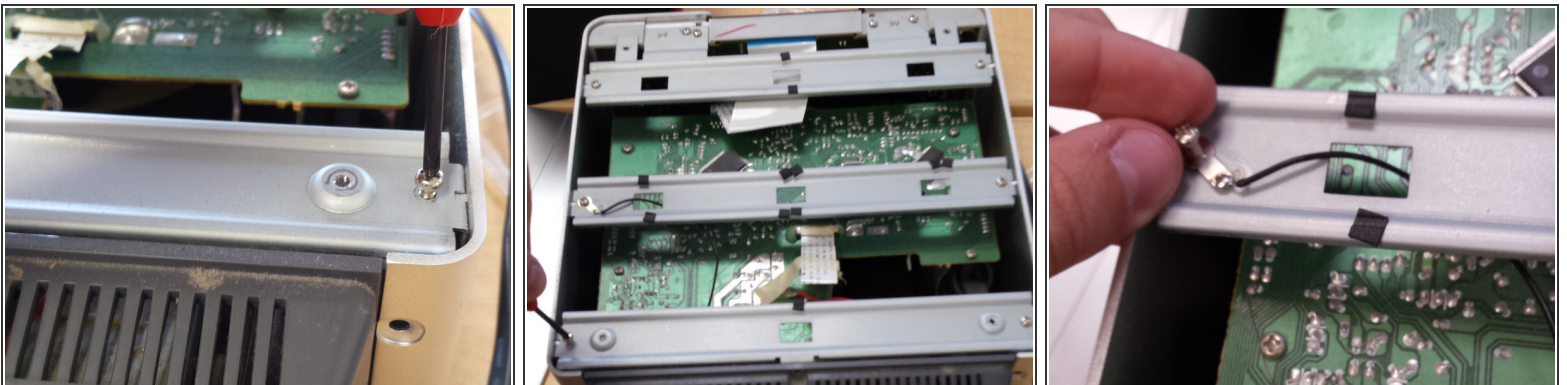

- Once you have the cover off, you will need to remove the 3 metal bars that are placed across the device. Be careful with the middle section, there is a wire attached to the screw that you will need to slide through the slot in the metal bar.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-18 09:09:10 PM.